

OTDR Report (1310 nm (9 μm))

General Information

File name:	17_1310.trc	Customer:	ADNOC
Test date:	14-Feb-24	Company:	PAN ARABIA
Test time:	4:05 PM	Fiber ID:	17
Cable ID:	FAR5 to SS6A (C) B (A-B)		
Job ID:	0500831		
Comments:	END TO END TEST		


Locations

	Location A	Location B
Location	FAR5	SS6A
Operator	PANDA	HABEEB
Model	MAX-720C-Q1-EA-EI	
Serial number	1206159	
Calibration date	29-Mar-23 (UTC)	

Results

Span length:	1.1470 km	Average loss:	0.758 dB/km	Injection level:	25.4 dB
Span loss:	0.870 dB	Average splice loss:	---		
Span ORL:	39.51 dB	Maximum splice loss:	---		

Graph

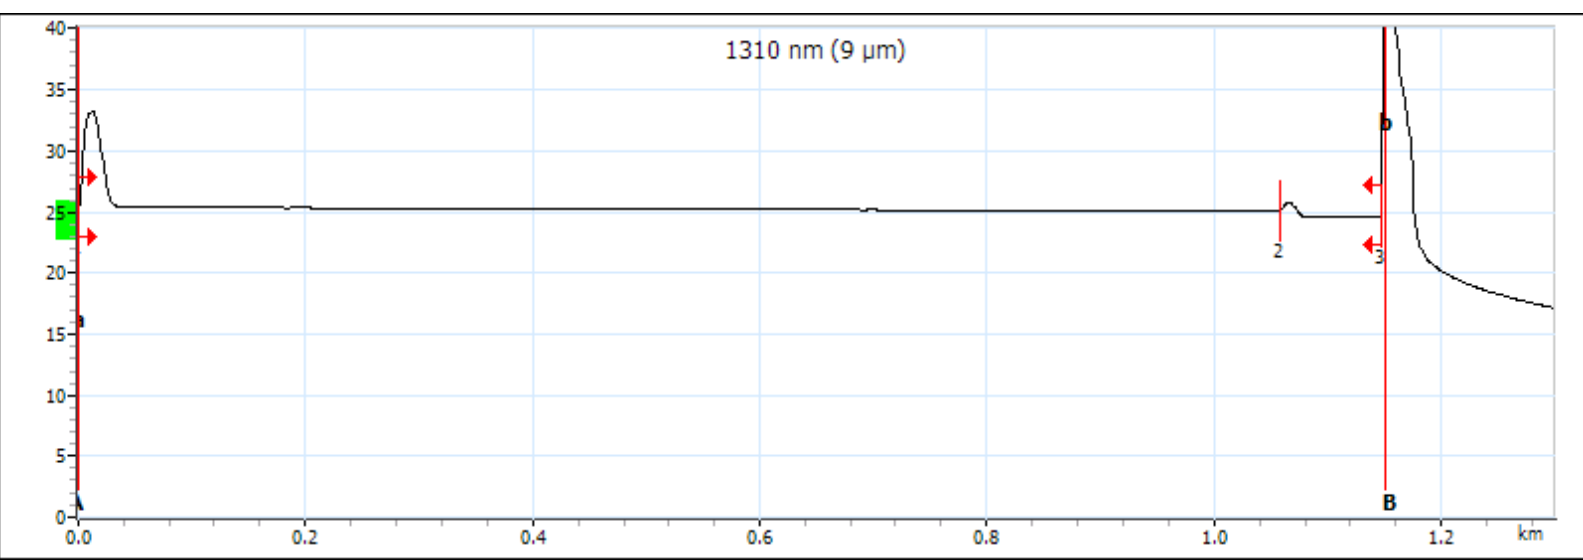

Markers

Marker	Position (km)	Value (dB)	A-B LSA attenuation:	0.952 dB/km	A-B average loss:	-14.008 dB/km
a	0.0000	25.418	A-B LSA loss:	1.096 dB	4-point Event Loss:	-16.515 dB
A	0.0000	25.418	A-B ORL:	<36.51 dB	Maximum reflectance:	>-27.4 dB
B	1.1502	41.530				
b	1.1502	41.530				

OTDR Report (1310 nm (9 μm))

Event Table

Type	No.	Pos./Length (km)	Loss (dB)	Reflectance (dB)	Attenuation (dB/km)	Cumulative (dB)
First Connector	1	0.0000	---	-43.6		0.000
Section		1.0574	0.361		0.341	0.361
Reflective	2	1.0574	0.461	-63.3		0.821
Section		0.0897	0.048		0.538	0.870
Reflective	3	1.1470	---	> -23.6		0.870

Macrobend

Position (km)	Delta Loss (dB)

Pass/Fail Thresholds

	1310 nm (9 μm)

Test Parameters

	A → B
Wavelength (nm)	1310 nm (9 μm)
Range (km)	1.3000
Pulse (ns)	100
Duration (s)	5

Test Settings

	A → B	Macrobend Wavelengths	Macrobend Delta Loss (dB)
IOR	1.467700		
Backscatter (dB)	-79.45		
Helix factor (%)	0.00		
Splice loss detection threshold (dB)	0.020		
Reflectance detection threshold (dB)	-72.0		
End-of-fiber detection threshold (dB)	5.000		

OTDR Report (1550 nm (9 μm))

General Information

File name:	17_1550.trc	Customer:	ADNOC
Test date:	14-Feb-24	Company:	PAN ARABIA
Test time:	4:05 PM	Fiber ID:	17
Cable ID:	FAR5 to SS6A (C) B (A-B)		
Job ID:	0500831		
Comments:	END TO END TEST		


Locations

	Location A	Location B
Location	FAR5	SS6A
Operator	PANDA	HABEEB
Model	MAX-720C-Q1-EA-EI	
Serial number	1206159	
Calibration date	29-Mar-23 (UTC)	

Results

Span length:	1.1469 km	Average loss:	0.498 dB/km	Injection level:	24.2 dB
Span loss:	0.571 dB	Average splice loss:	---		
Span ORL:	41.74 dB	Maximum splice loss:	---		

Graph

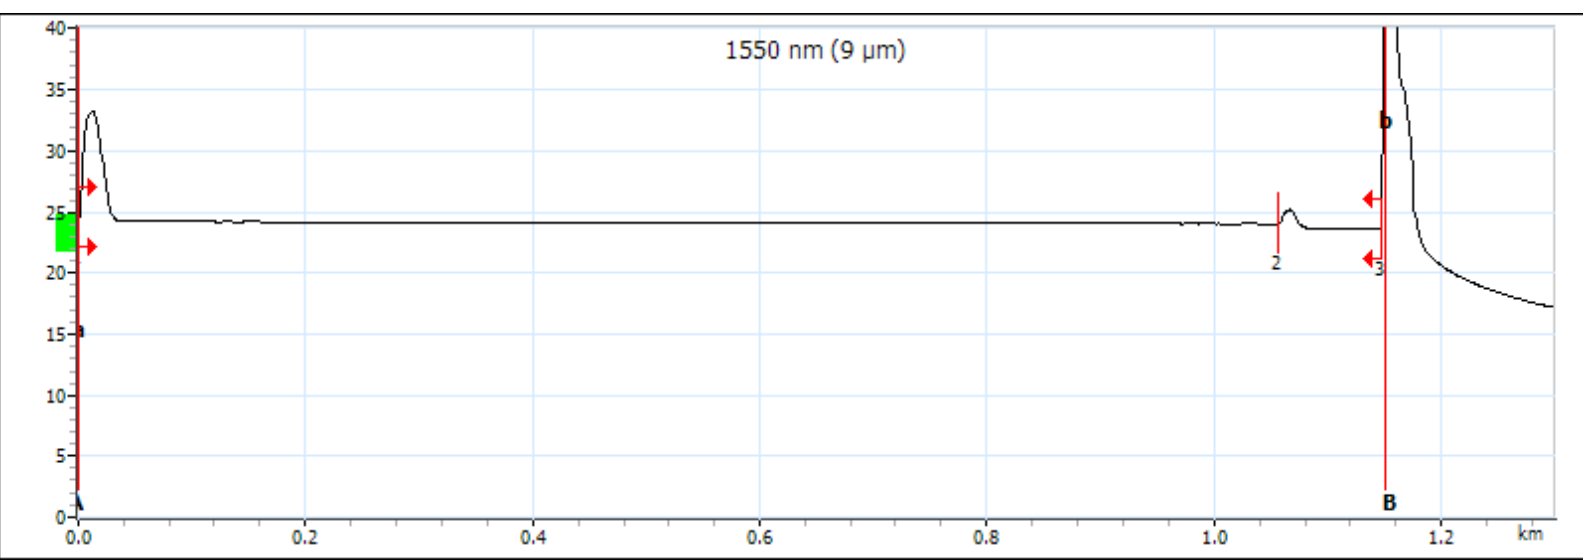

Markers

Marker	Position (km)	Value (dB)	A-B LSA attenuation:	0.836 dB/km	A-B average loss:	-14.785 dB/km
a	0.0000	24.671	A-B LSA loss:	0.962 dB	4-point Event Loss:	-17.236 dB
A	0.0000	24.671	A-B ORL:	<36.36 dB	Maximum reflectance:	> -27.1 dB
B	1.1502	41.677				
b	1.1502	41.677				

OTDR Report (1550 nm (9 μm))

Event Table

Type	No.	Pos./Length (km)	Loss (dB)	Reflectance (dB)	Attenuation (dB/km)	Cumulative (dB)
First Connector	1	0.0000	---	-43.7		0.000
Section		1.0572	0.201		0.190	0.201
Reflective	2	1.0572	0.339	-63.2		0.540
Section		0.0896	0.031		0.346	0.571
Reflective	3	1.1469	---	> -24.1		0.571

Macrobend

Position (km)	Delta Loss (dB)

Pass/Fail Thresholds

	1550 nm (9 μm)

Test Parameters

	A → B
Wavelength (nm)	1550 nm (9 μm)
Range (km)	1.3000
Pulse (ns)	100
Duration (s)	5

Test Settings

	A → B	Macrobend Wavelengths	Macrobend Delta Loss (dB)
IOR	1.468325		
Backscatter (dB)	-81.87		
Helix factor (%)	0.00		
Splice loss detection threshold (dB)	0.020		
Reflectance detection threshold (dB)	-72.0		
End-of-fiber detection threshold (dB)	5.000		